

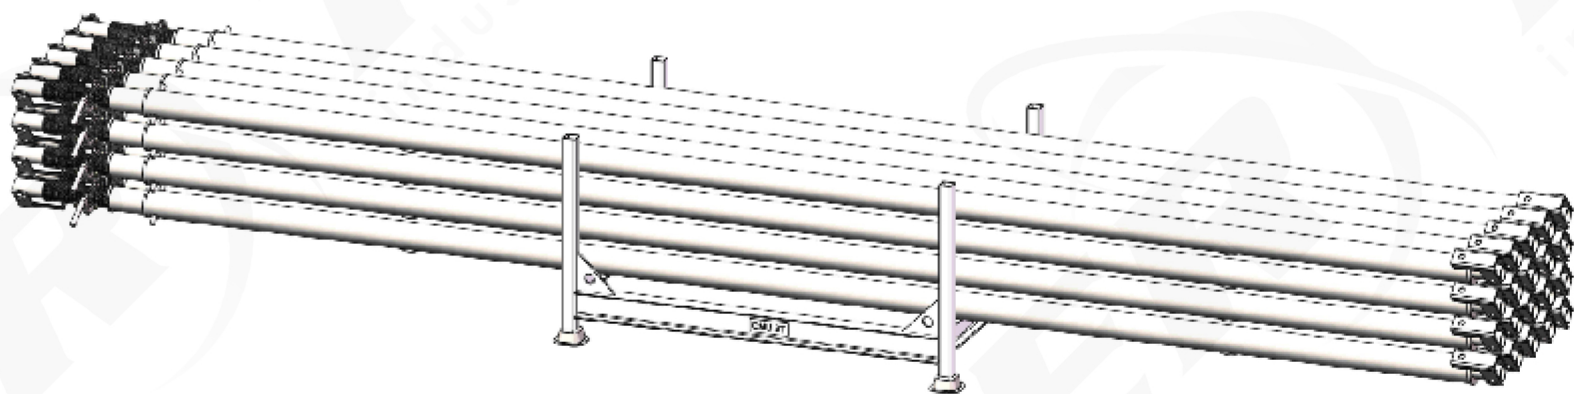
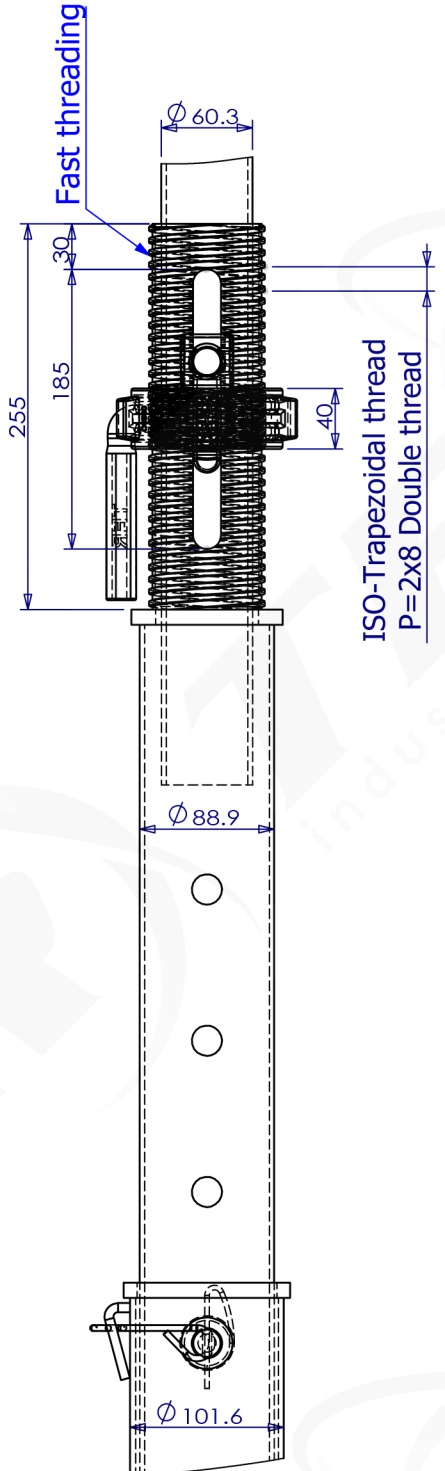
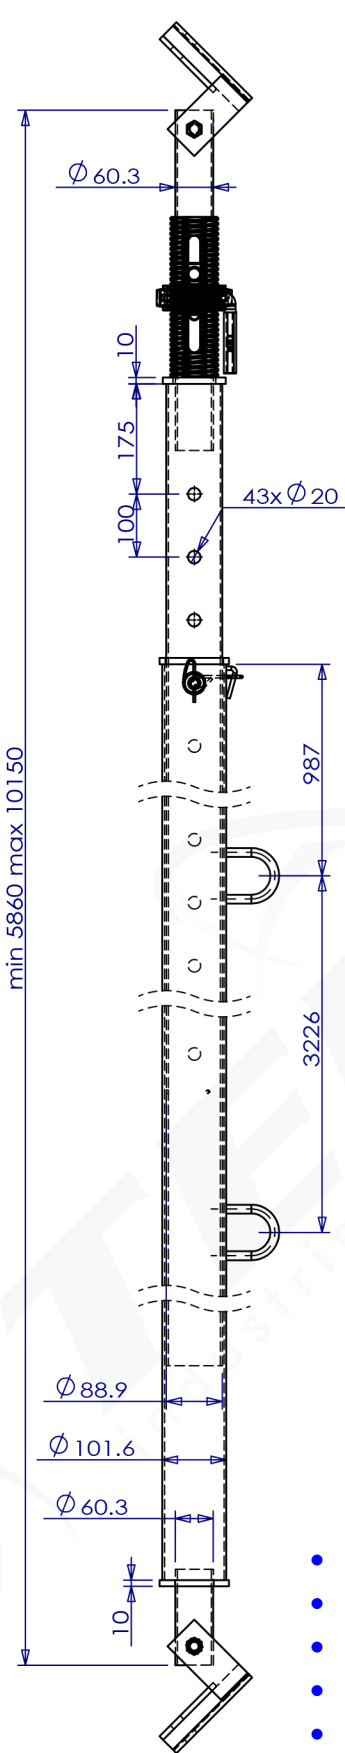

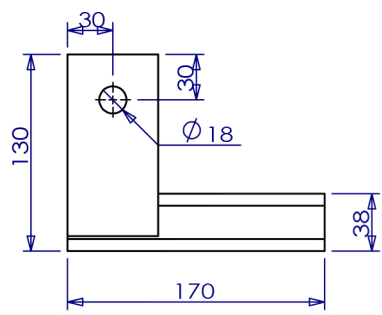

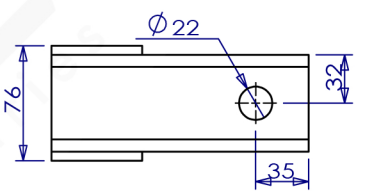


Container 40OT : 12 baskets x 20 pcs=240 pcs (24 tons)

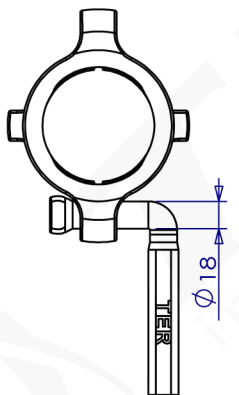

Steel S355

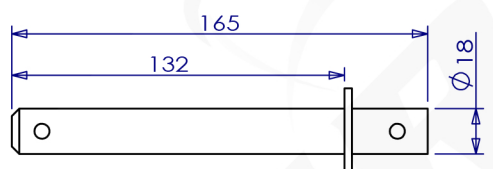

- **Outer tube:** $\Phi 101.6 \times 3.6$ mm
- **Inner tube:** $\Phi 88.9 \times 3.2$ mm
- **Open thread**
- **Base strut:** $\Phi 60.3 \times 3.2$ mm
- **Reducing outer tube size:** $\Phi 60.3 \times 3.2$ mm
- **Pin:** $\Phi 18$ mm, lg 165 acier S355
- **TP1000 endplates:** length 185 mm attachment using HM16 x 100 bolts + HM16 nut in $\Phi 17$ mm hole
- **Cast-iron nut:** $\Phi 76$ mm bichromate-plated with adjusting handle
- $\Phi 18$ mm and 2 adaptateurs TP (système breveté)
- **Shoe drilling diameter:** $\Phi 22$ mm

Extension	TP1000-1 6 à 10
(m)	(kN)
6,0	34,00
6,5	34,00
7,0	29,00
7,5	24,00
8,0	20,00
8,5	17,00
9,0	14,00
9,5	12,00
10,0	10,00



Hot galvanized following EN-ISO 1461

TOTAL WEIGHT OF THE ELEMENT: 96,00 kg



TER INDUSTRIES.CO.,LTD
No.151 Xiaokang road, Dongchen town,
Rugao city Jiangsu province, China
Ph: +86 19555080700
E-mail: info@ter-industries.com



零件名称TITLE:
THE HIGH-PUSH-PULL PROP

图号DWG NO.:
TER TP1000-1