



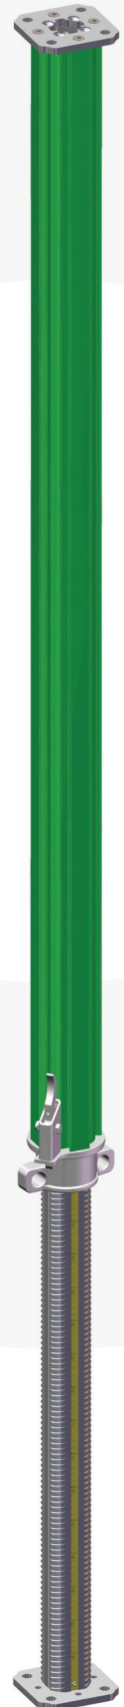

Aluminium props


For strong load support

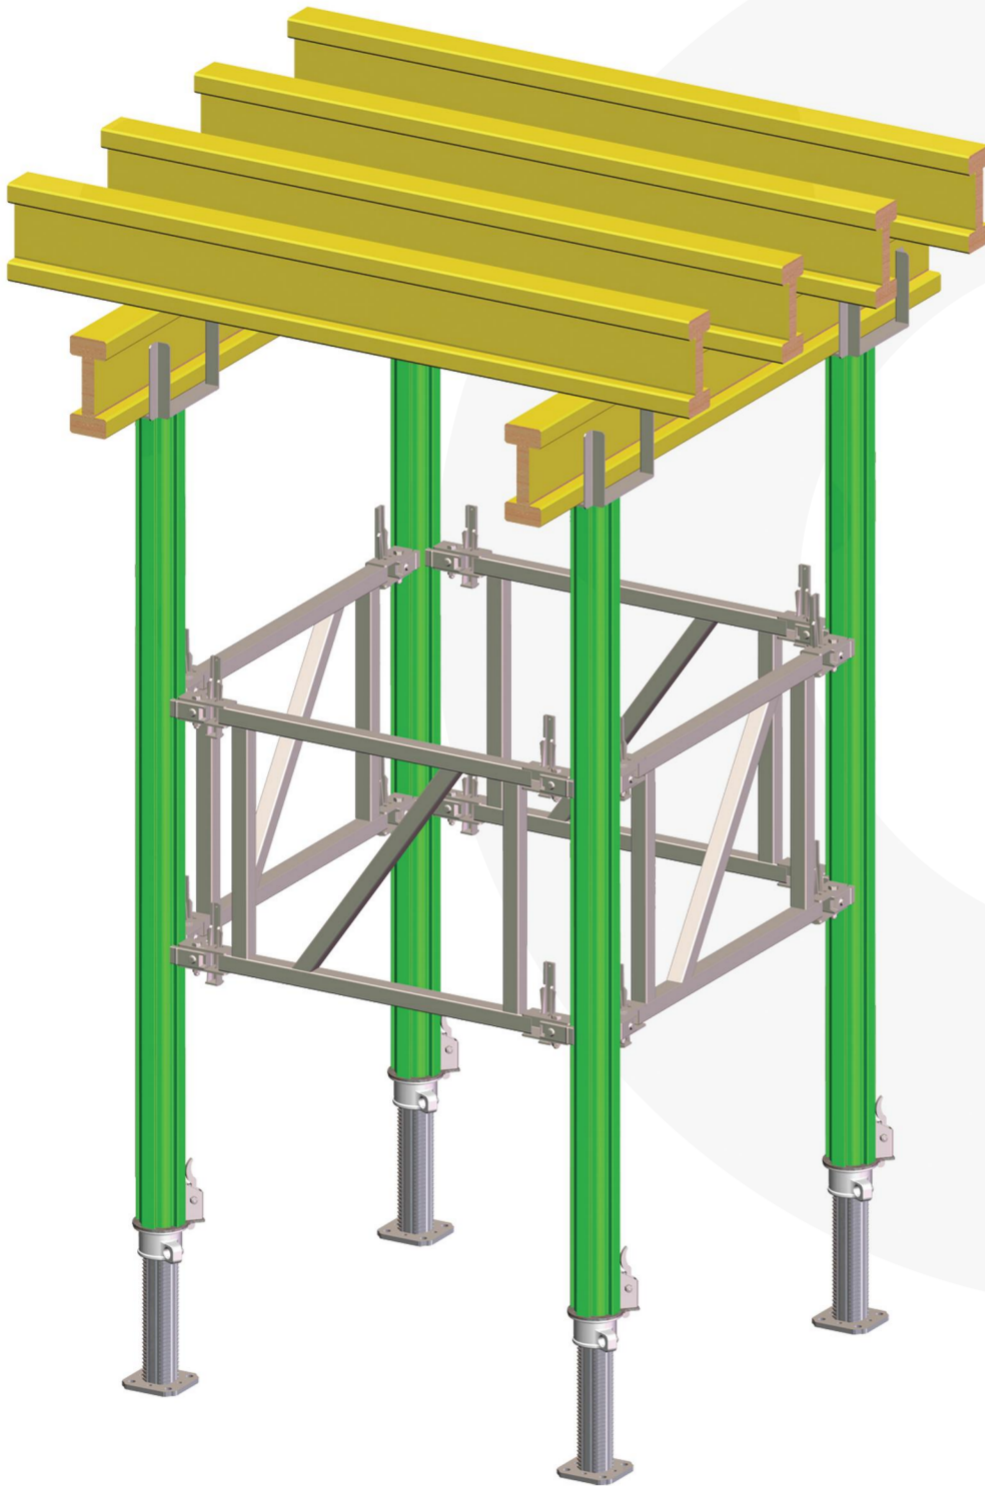

TER ALP

TER ALP EN-16031

Detail outer tube

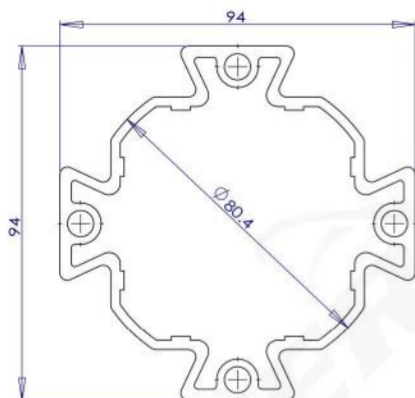

Detail inner tube


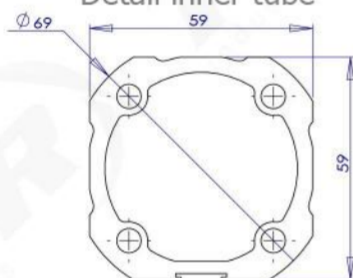



Plate 10mm



PAINTED	ENGINEERING DATA
<i>TERALP305</i>	- h closed 1.75 m - h open 3.05 m - weight 12.50 kg
<i>TERALP350</i>	- h closed 2.10 m - h open 3.50 m - weight 14.00 kg
<i>TERALP400</i>	- h closed 2.70 m - h open 4.00 m - weight 16.00 kg
<i>Colour on request</i>	Packing 72 pcs

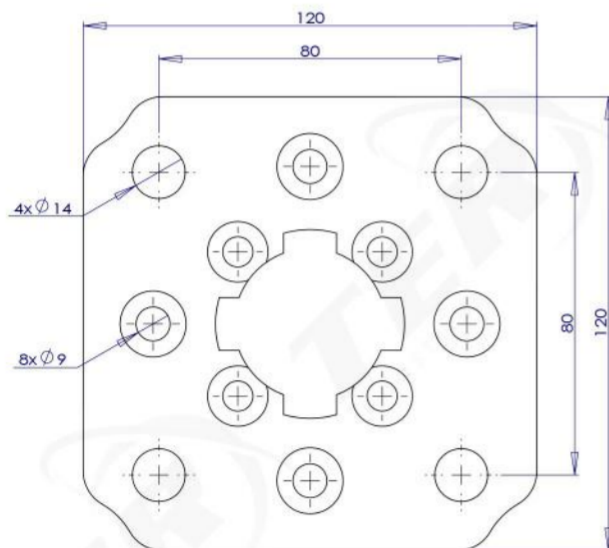

Aluminium props are compliant with the EN 16031 standard pertaining to adjustable telescopic aluminium props. The very high mechanical strength of the aluminium props allows a high loading capacity.

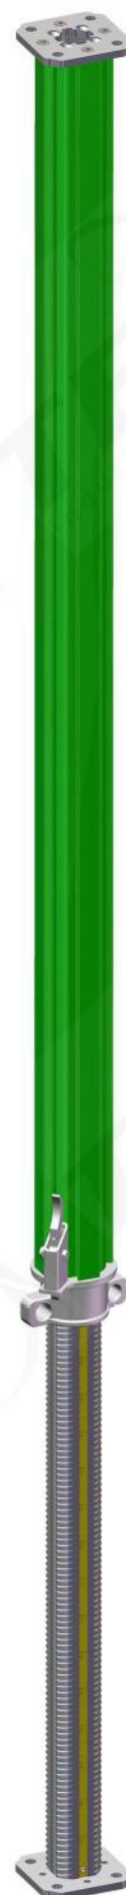


WORKING LOAD EN-16031

	TER ALP		Aluminium prop EN 16031:2012
Code	TERALP305 L = 3.05 - 1.75 m	TERALP350 L = 3.5 - 2.10 m	TERALP400 L = 4.0 - 2.7 m
Class	D	D	D
Weight	12.50 kg	14.00 kg	16.00 kg
Extended Length (m)			
1.80	60kN		
1.90	60kN		
2.00	60kN		
2.10	60kN	60kN	
2.20	60kN	60kN	
2.30	60kN	60kN	
2.40	55kN	60kN	
2.50	49kN	60kN	
2.60	45kN	50kN	
2.70	41kN	44kN	47kN
2.80	36kN	43kN	47kN
2.90	32kN	40kN	47kN
3.00	30kN	37kN	45kN
3.05	28kN	36kN	43kN
3.10		34kN	40kN
3.20		31kN	36kN
3.30		29kN	34kN
3.40		25kN	31kN
3.50		23kN	30kN
3.60			27kN
3.70			25kN
3.80			24kN
3.90			22kN
4.00			20.6kN
Description			
• Small-diameter prop very lightweight • High loads • Can be used for casting or drying • Threading to any height self-cleaning • Captive slide		• Customisable to suit client's colours • Quality epoxy paint for easy maintenance • Long working life • Certification by an independent laboratory according to the EN 16031 standard - Classes D to U	

Working principle

Manufacturing Standards EN 16031

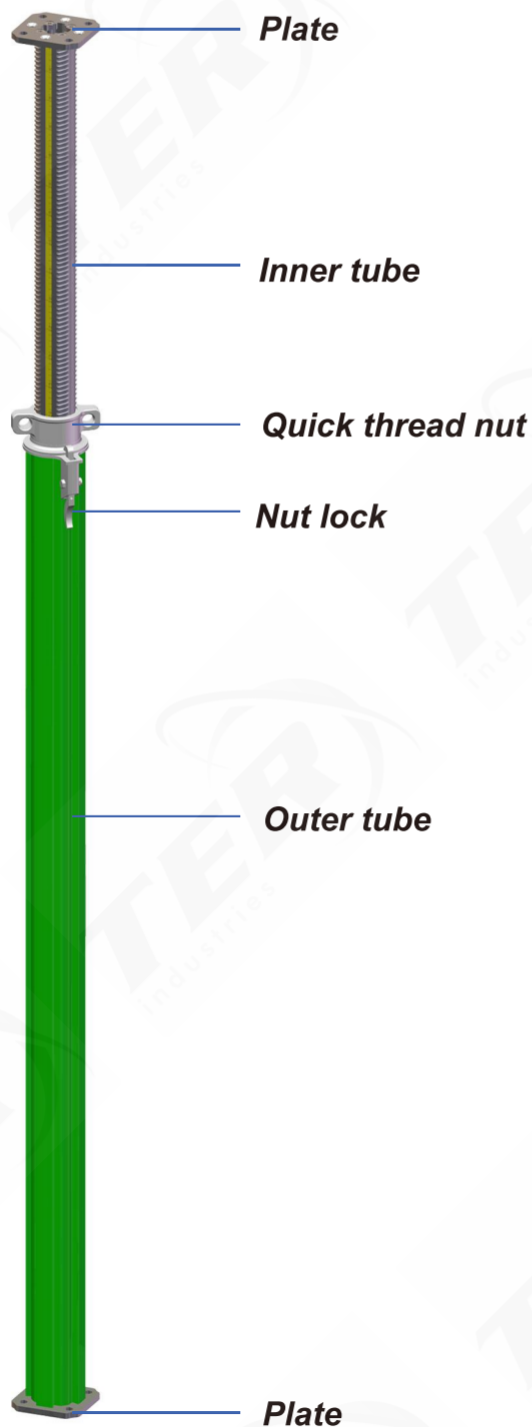


With one hand, press on the lock.

With the other hand, pipe the nut to release it.




Position the inner tube to its final adjustment.




Unscrew the nut to bring it into contact with the outer tube.

Release the inner tube

The nut automatically locks on the outer tube.

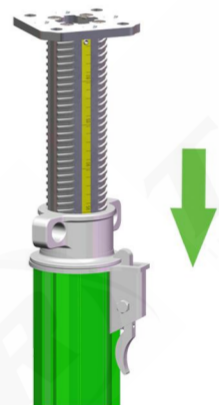


Make the final adjustment with the nut.

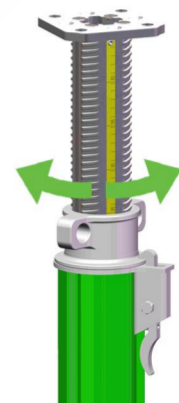



TER ALPR EXTENSION

PAINTED	ENGINEERING DATA
<i>TERALPR500</i>	- h 0.5 m - weight 2.30 kg
<i>TERALPR1000</i>	- h 1.0 m - weight 4.00 kg
<i>TERALPR1500</i>	- h 1.5 m - weight 5.60 kg
<i>TERALPR2000</i>	- h 2.0 m - weight 7.30 kg
<i>TERALPR3000</i>	- h 3.0 m - weight 10.60 kg

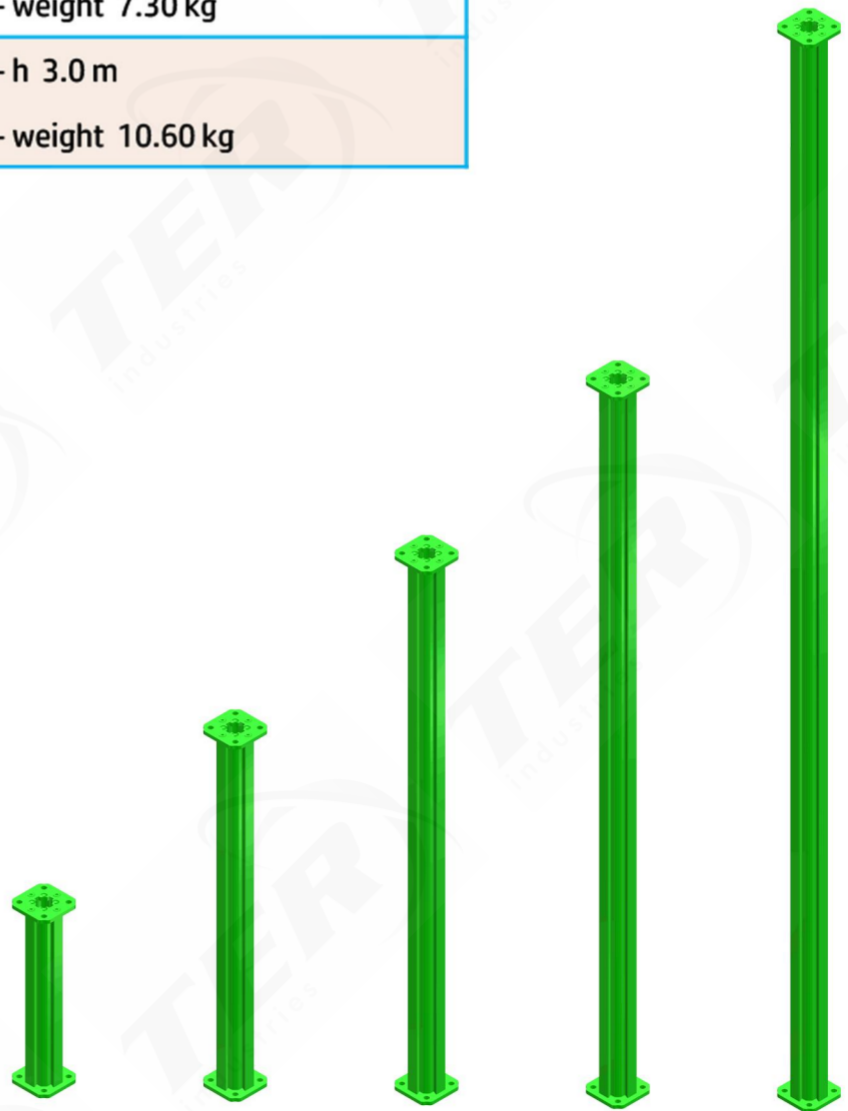


STEEL FRAMES


Code	ENGINEERING DATA
<i>TERSF750</i>	- L= 0.75 m - weight 8.30 kg - galvanized - packing 40 pcs
<i>TERSF1000</i>	- L= 1.00 m - weight 10.40 kg - galvanized - packing 40 pcs
<i>TERSF1500</i>	- L= 1.50 m - weight 13.60 kg - galvanized - packing 20 pcs
<i>TERSF2000</i>	- L= 2.00 m - weight 16.70 kg - galvanized - packing 20 pcs
<i>TERSF2500</i>	- L= 2.50 m - weight 19.90 kg - galvanized - packing 20 pcs
<i>TERSF3000</i>	- L= 3.00 m - weight 23.00 kg - galvanized - packing 20 pcs

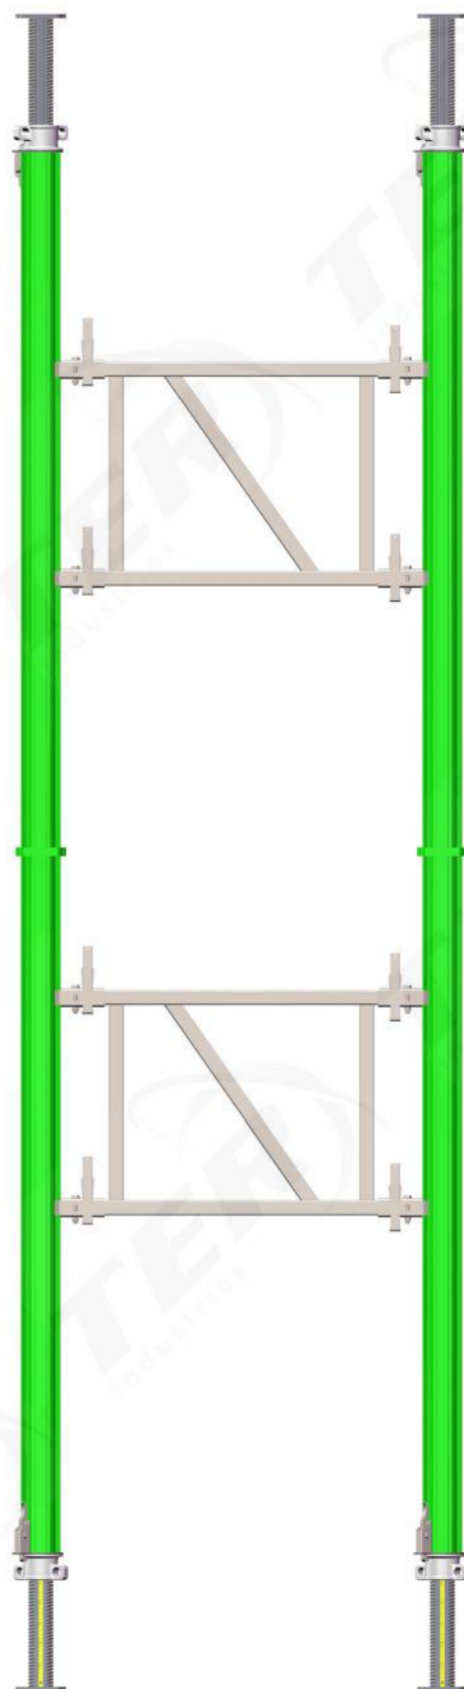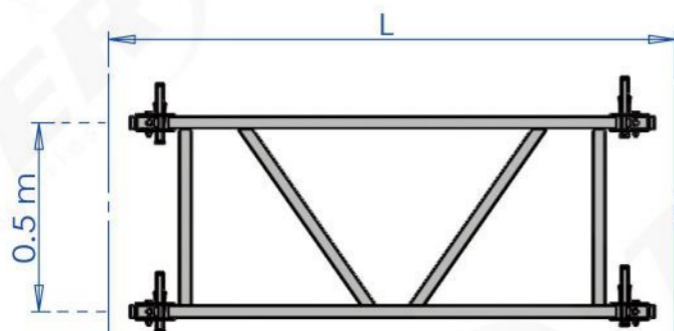


Package

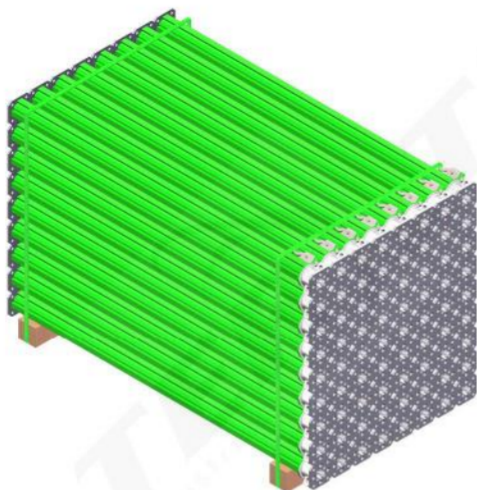


STANDARD PACKING
Qt: 72 pcs

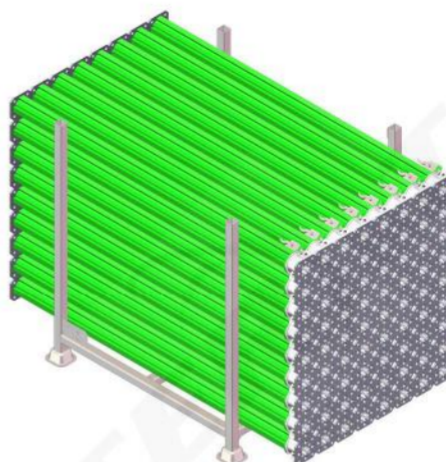

BASKET PACKING
Qt: 72 pcs

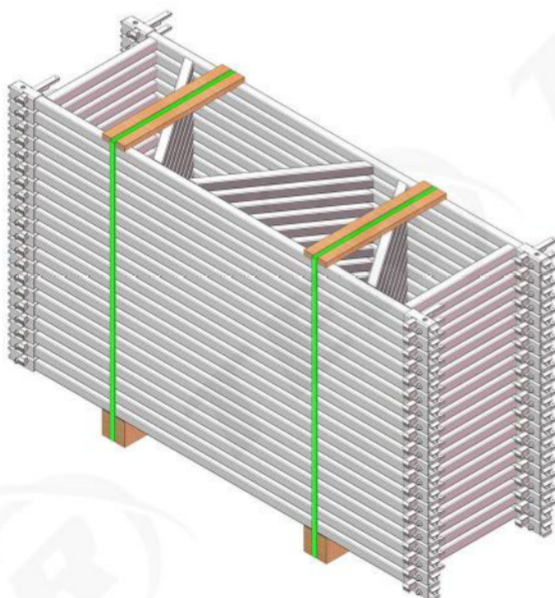

STANDARD PACKING
Qt: 20 pcs

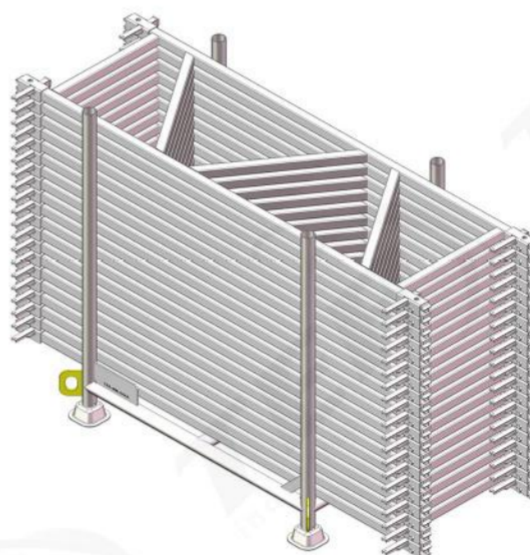

BASKET PACKING
Qt: 20 pcs



Add: 151 Xiaokang Road, Dongchen Town,
Rugao City Jiangsu Province CHINA

TEL: +86 19555080700

E-mail: info@ter-industries.com
www.ter-industries.com

