

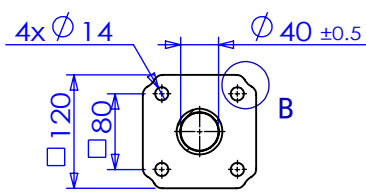
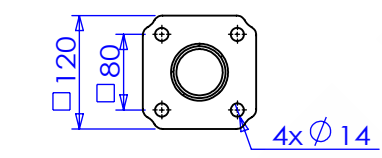


SECTION A-A

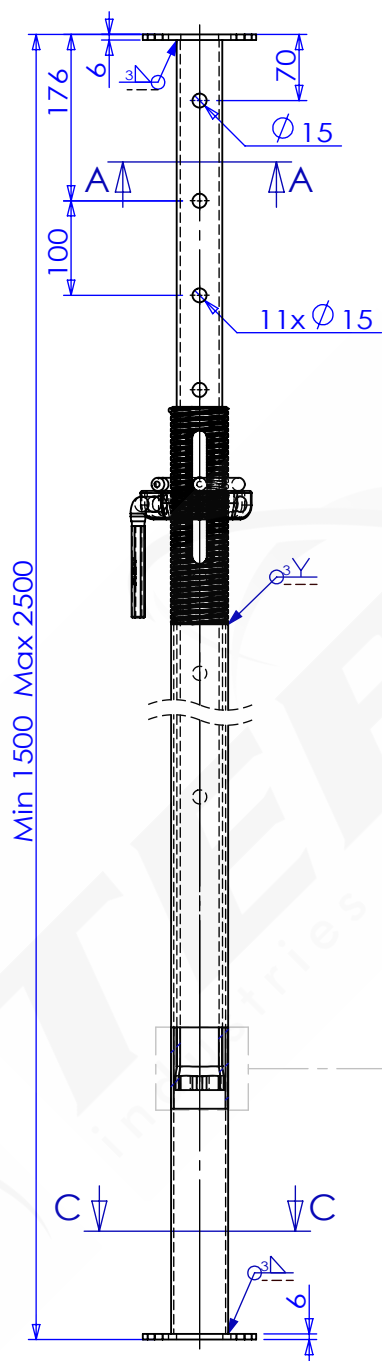



DETAIL B




SECTION C-C

SECTION E-E

Permanent prevention against unintentional disengagement

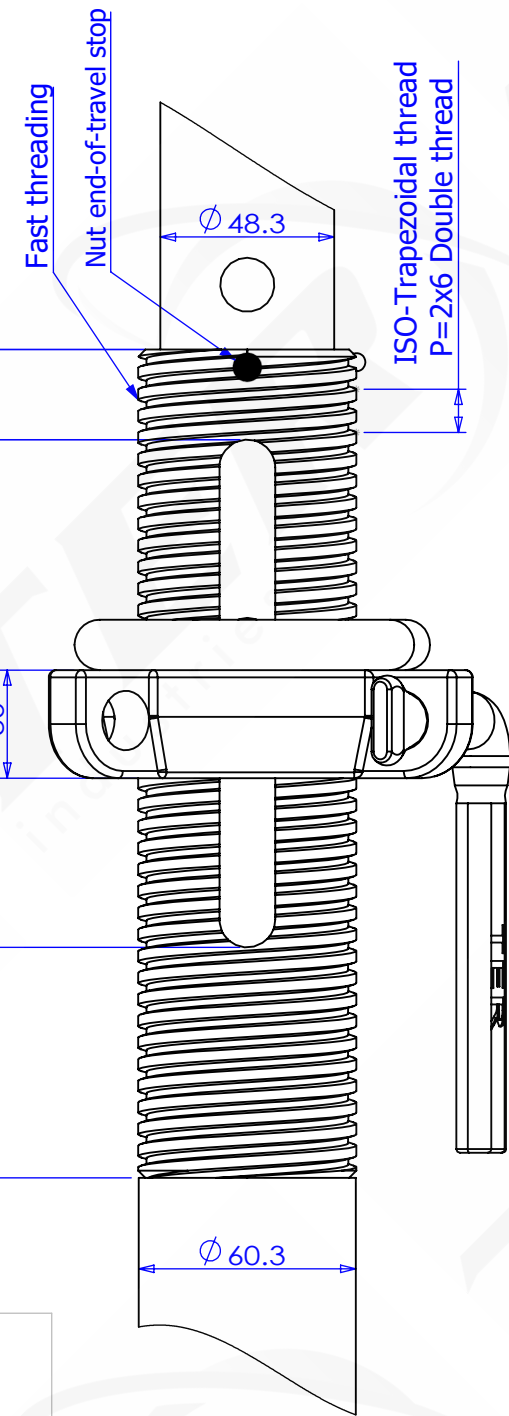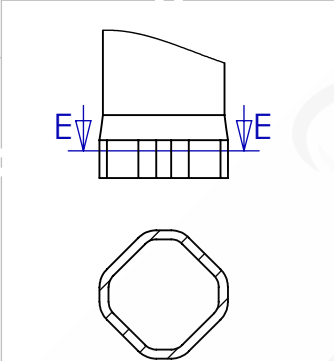


Container 20GP : 18 bundles x 50 pcs= 900 pcs (12.6 tons)
Container 40GP : 37 bundles x 50 pcs=1850 pcs (25.9 tons)



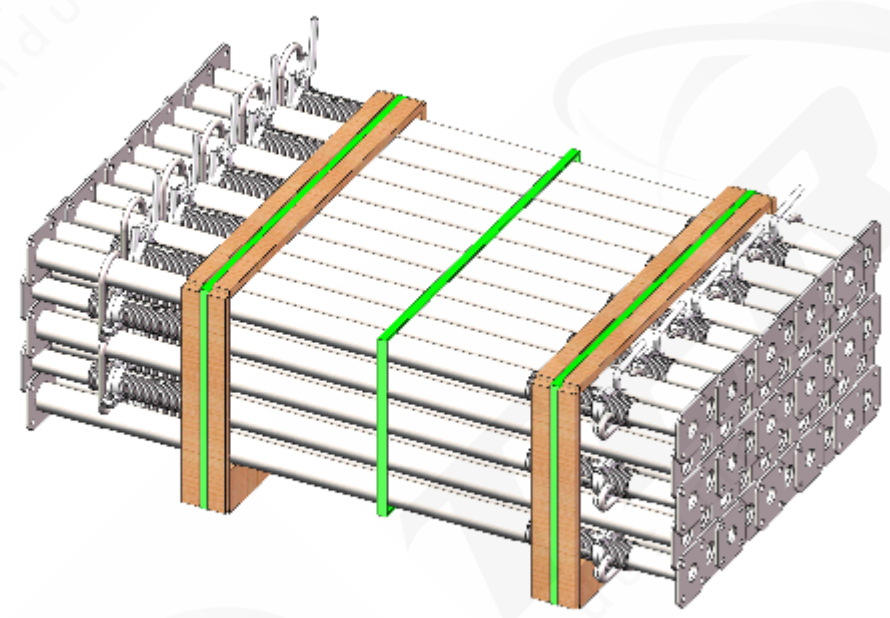


Steel S355

Shaped pin(the geometry is designed to facilitate insertion)

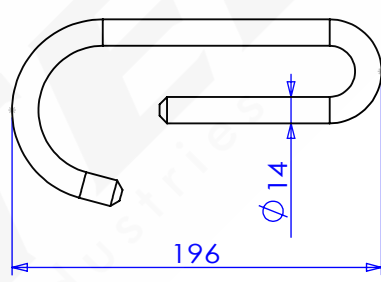

Forged steel nut

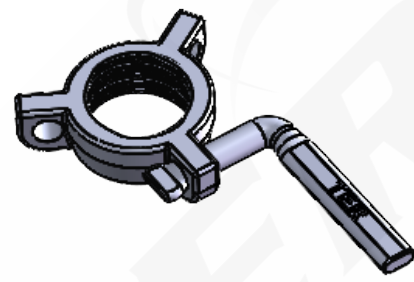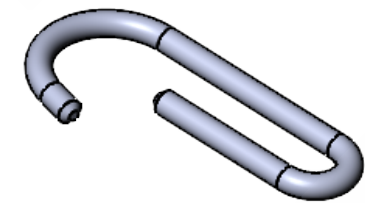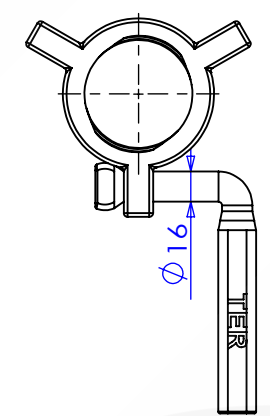

Extension (M)	D25 1,5 to 2,5 (kN)
1,5	20,60
1,6	20,60
1,7	20,60
1,8	20,60
1,9	20,60
2,0	20,60
2,1	20,60
2,2	20,60
2,3	20,60
2,4	20,60
2,5	20,60



Hand safety system (to avoid the crushing of the hand, when the prop is closed, at least 10 cm of free length of the inner tube is guaranteed)

Hot galvanized following EN-ISO 1461

Options:

- Foot reinforcement
- Pin with quick release
- Possibility of marking the handle nut
- Applying a sticker
- Painted nut (color of your choice)
- Possibility of engraving a text on the outer tube
- Possibility of packing in racks

TOTAL WEIGHT OF THE ELEMENT: 13.40 kg



日期DATE : 2023/01/15	材质 MATERIAL:
版次REV. : A	标准 NORM: EN 1065-Ü



零件名称TITLE: PROP EN1065 D25

图号DWG NO.

TERD25

This drawing is property of the company and its reproduction is not allowed without our written approval.