

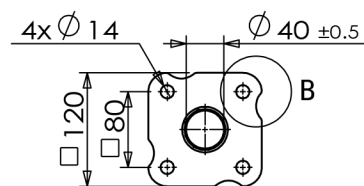


## SECTION A-A

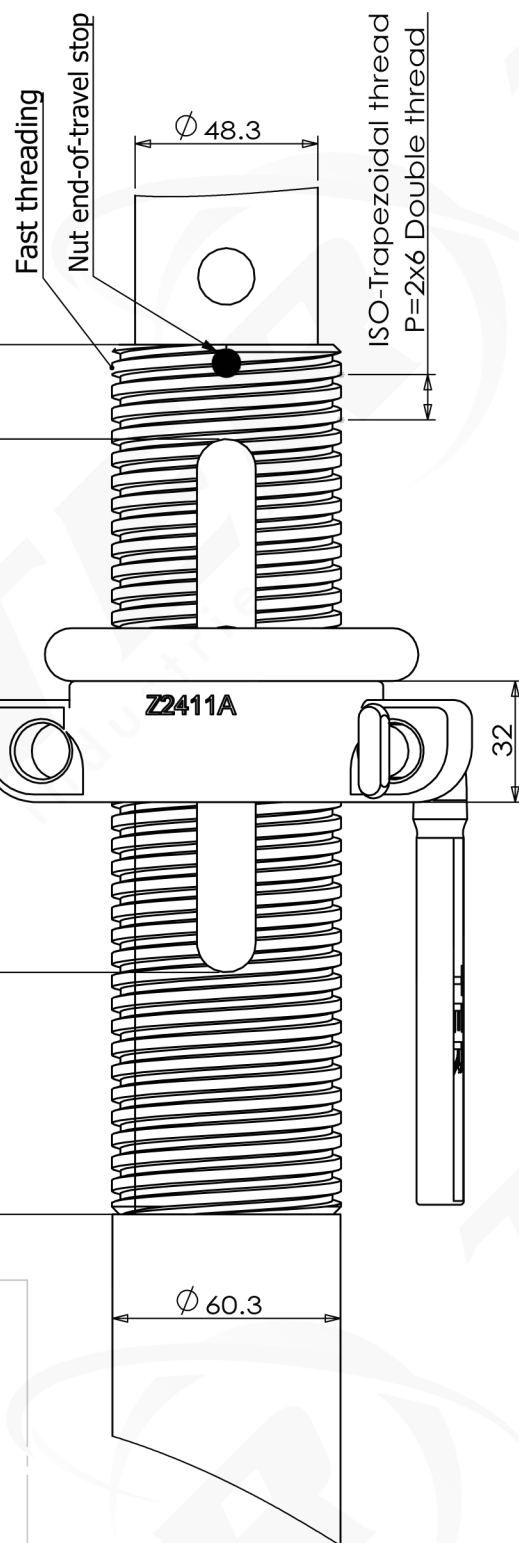


## DETAIL B






Container 20GP : 18 boxes x 50 pcs=900 pcs ( 11 tons )

Container 40GP : 36 boxes x 50 pcs=1800 pcs ( 22 tons )

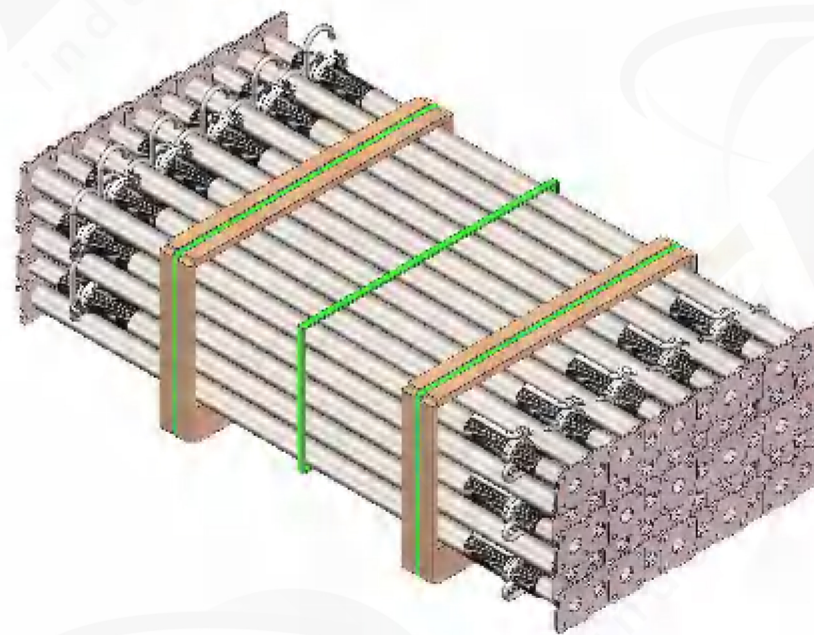


## Steel S355

Shaped pin(the geometry is designed to facilitate insertion)

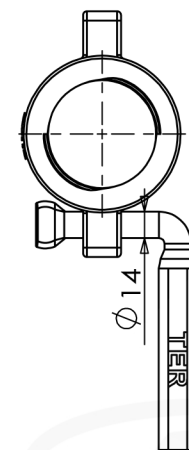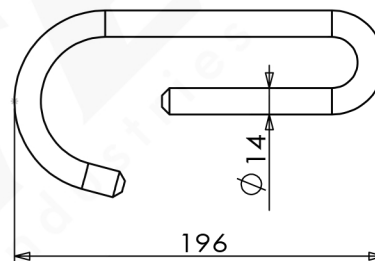


| Extension (M) | B25 1,5 à 2,5 (kN) |
|---------------|--------------------|
| 1,5           | 30,90              |
| 1,6           | 30,90              |
| 1,7           | 30,90              |
| 1,8           | 30,90              |
| 1,9           | 28,54              |
| 2,0           | 25,76              |
| 2,1           | 23,36              |
| 2,2           | 21,29              |
| 2,3           | 19,48              |
| 2,4           | 17,89              |
| 2,5           | 16,48              |

Hand safety system (to avoid the crushing of the hand, when the prop is closed, at least 10 cm of free length of the inner tube is guaranteed)

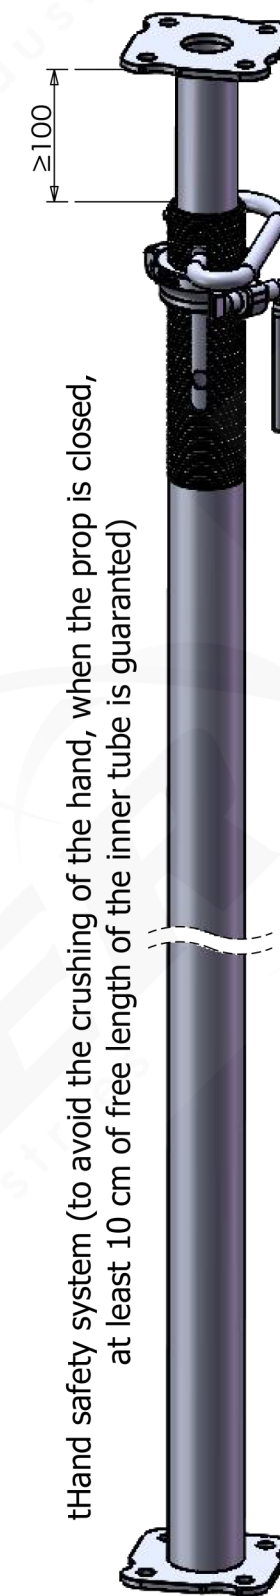


Hot galvanized following EN-ISO 1461

## SECTION C-C



## SECTION D-D

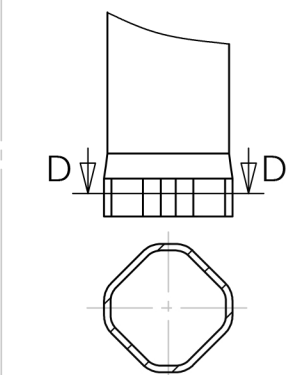

Permanent prevention against unintentional disengagement

## Options:

- Foot reinforcement
- Pin with quick release
- Possibility of marking the handle nut
- Applying a sticker
- Painted nut (color of your choice)
- Possibility of engraving a text on the outer tube
- Possibility of packing in racks

TOTAL WEIGHT OF THE ELEMENT: 11.50 kg



TER INDUSTRIES.CO.,LTD  
No.151 Xiaokang road, Dongchen town,  
Rugao city Jiangsu province, China  
Ph: +86 19555080700  
E-mail: info@ter-industries.com



零件名称TITLE:

PROP EN1065 B25

图号DWG NO.

B25

日期DATE : 2023/01/15

版次REV. : A

标准 NORM: EN 1065-Ü

This drawing is property of the company and its reproduction is not allowed without our written approval.