

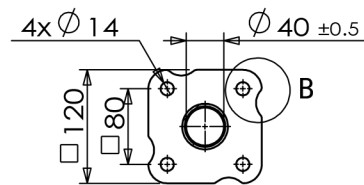



SECTION A-A

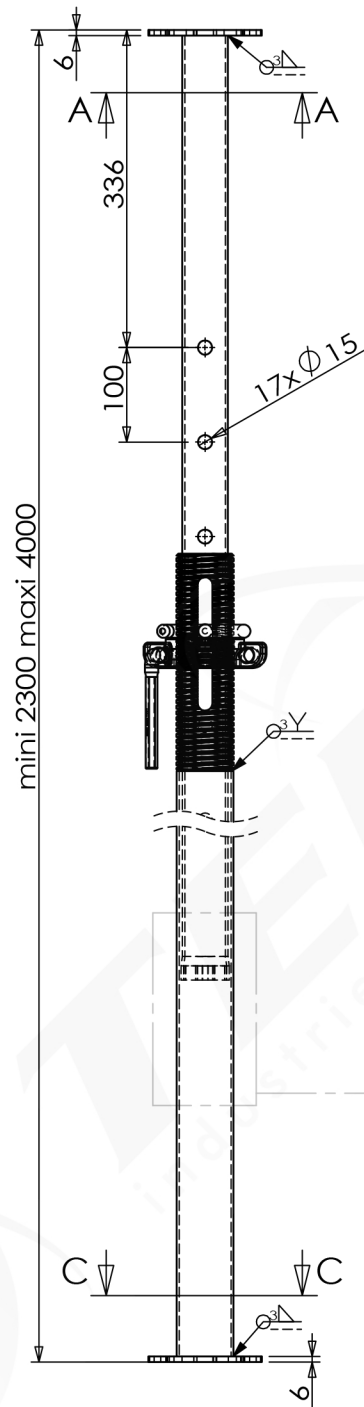


DETAIL B



SECTION C-C

SECTION D-D



Permanent prevention
against unintentional
disengagement

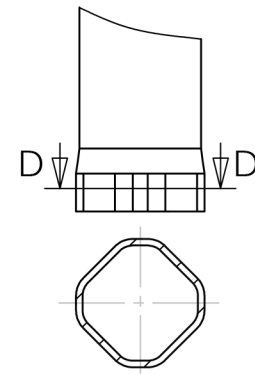

Options:





- Foot reinforcement
- Pin with quick release
- Possibility of marking the handle nut
- Applying a sticker
- Painted nut (color of your choice)
- Possibility of engraving a text on the outer tube
- Possibility of packing in racks

Container 20GP : 18 boxes x 50 pcs=900 pcs (15.3 tons)
Container 40GP : 30 boxes x 50 pcs=1500 pcs (25.5 tons)

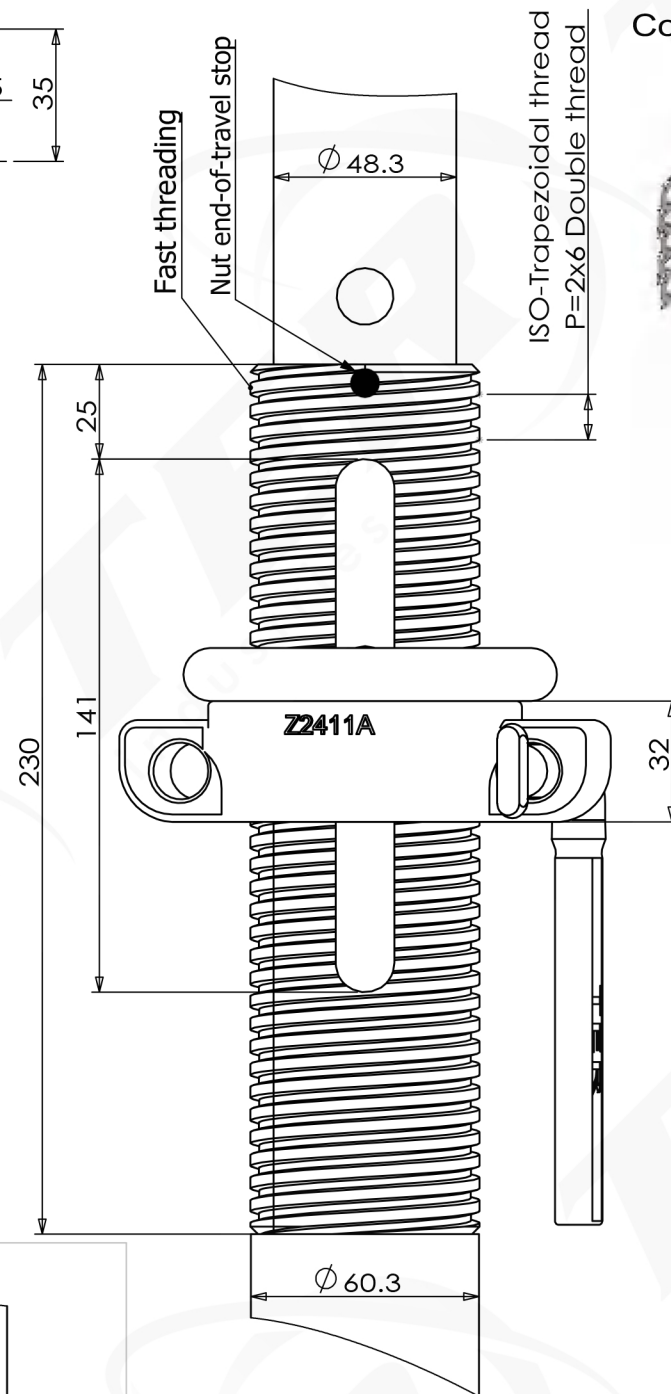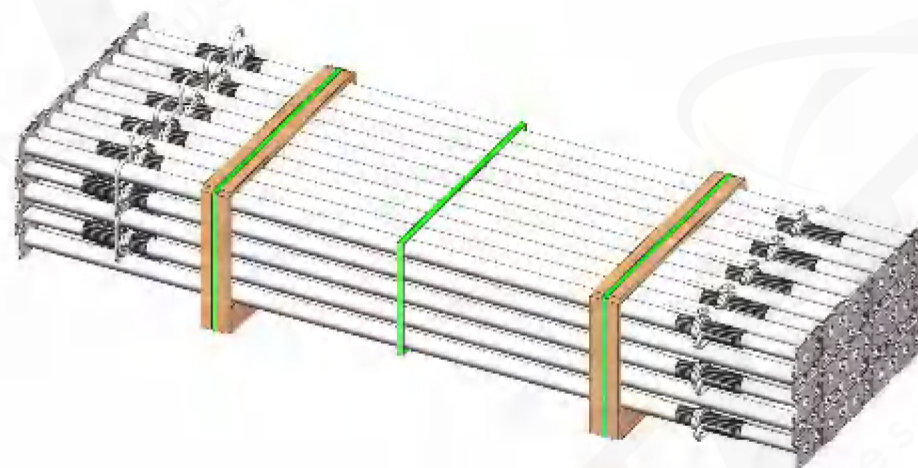

Steel S355

Shaped pin(the geometry is
designed to facilitate insertion)

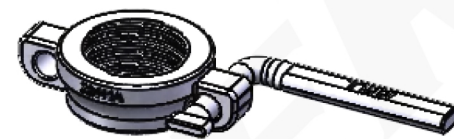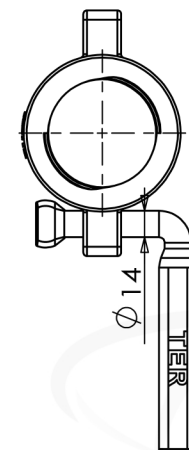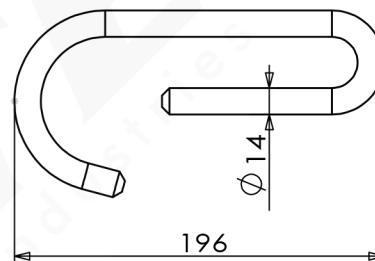

Extension (M)	B40 2,3 à 4 (kN)
2,3	30,90
2,4	28,62
2,5	26,38
2,6	24,39
2,7	22,61
2,8	21,03
2,9	19,60
3,0	18,32
3,1	17,15
3,2	16,10
3,3	15,14
3,4	14,26
3,5	13,46
3,6	12,72
3,7	12,04
3,8	11,42
3,9	10,84
4,0	10,30



Hand safety system (to avoid the crushing of the hand, when the prop is closed,
at least 10 cm of free length of the inner tube is guaranteed)

Hot galvanized following EN-ISO 1461

TOTAL WEIGHT OF THE ELEMENT: 16.40 kg



TER INDUSTRIES.CO.,LTD
No.151 Xiaokang road, Dongchen town,
Rugao city Jiangsu province, China
Ph: +86 19555080700
E-mail: info@ter-industries.com



零件名称TITLE:

PROP EN1065 B40

图号DWG NO.

B40

日期DATE : 2023/01/15

版次REV. : A

标准 NORM: EN 1065-Ü

This drawing is property of the company and its reproduction is not allowed without our written approval.